

# GGB HAZARDOUS MATERIAL CONTAINER

- Easy to clean
- Environmentally friendly, fully recyclable.
- Light weight
- Pressurized emptying possible
- Maximize end-user safety.
- 30 years lifespan.
- Ergonomic handholds.



## UN APPROVED CONTAINERS FOR THE TRANSPORT OF DANGEROUS GOODS

MAKING HAZMAT TRANSPORT SAFER.

Stainless steel small VOLUME returnable (SVR) containers are ideal for the transport and storage of flammable liquids (class 3), flammable solids (class 4), oxidizing substances and organic peroxides (class 5), toxic substances (class 6.1), corrosive products (class 8) and other substances (class 9).

THIELMANN stainless steel containers are pressurizable and vacuum proof. The long term usability and fully recyclable material of our SVRs lower operation costs, protect the environment and maximize end-user safety.

### Common uses:

- Hazardous materials
- Flammable materials
- Toxic materials

\* GMP adequate version available upon request

\* Aseptic version available upon request


*Yes, gevonden!*

*CONSENSYS biedt de oplossingen voor ons!*

*Bel jij met een aanvraag?*

*>> Gerard Noordhof*

*op +31 6 3039 2646*

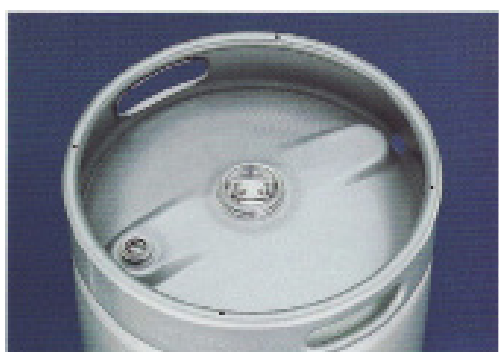

## CERTIFICATIONS

- UN Hazardous Materials Permit as per UN1A1 for packaging categories I, II and III. UN 1A1 for packaging

## HANDLING

- Handle skirts
- Support skirts optionally stack skirt
- Withdrawal and coupling systems

## ADVANTAGES

- Material AISI 304 or 316 stainless steel
- Tri Sure plug in PP with rubber or EPDM O-ring
- Lettering possibilities embossed or engraved
- With rolling rings for label protection and colour marking
- RFID tags for tracking purposes

## VOLUME

- 10 - 250 LITRES.

CAPACITY (LITRES)	DIAMETER Ø (MM)	HEIGHT (MM)	CONNECTIONS		WEIGHT APPROX (KG)	WORKING OVER PRESSURE (BAR)	UN APPROVAL CLASS:
10	278	277	G2"	G3/4"	5.1	6.0	
12	278	310	G2"	G3/4"	5.3	6.0	
20	278	445	G2"	G3/4"	6.8	6.0	
22.5	278	487	G2"	G3/4"	7.2	6.0	
30	363 - 395	416 - 365	G2"	G3/4"	9.8 - 10.2	6.0 - 6.0	3,4,5,6,1,8,9
33	363 - 395	445 - 390	G2"	G3/4"	10.2 - 10.6	6.0 - 6.0	
40	363 - 395	531	G2"	G3/4"	12.4 - 12.6	4.0 - 4.0	
50	363 - 395	644	G2"	G3/4"	14.6	3.0	
60	363 - 395	757	G2"	G3/4"	18.6	2.0	
250	363 - 395	1514	G2"	G3/4"	34.2	0.9	

contactgegevens

**CONSENSYS**

+31 (0) 334 572 592

info@consensys.nl

www.consensys.nl

THIELMANN UCON GmbH

Gustav-Rivinius Platz 2 - 77756 Hausach - Germany

Tel. +49 7831 77269 | Email: sales@thielmann.com

www.thielmann.com