

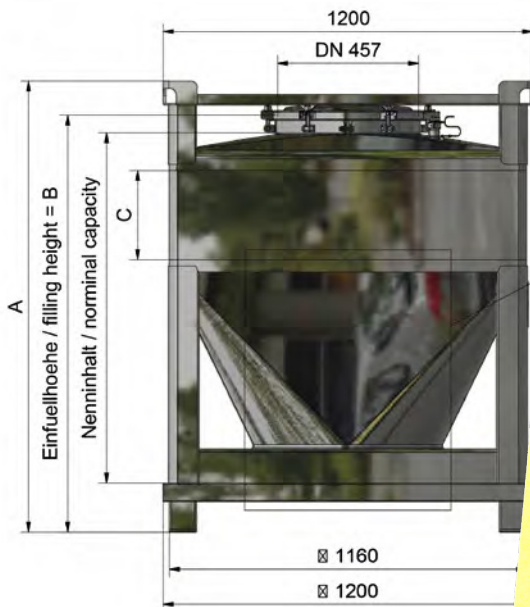


BPK 3 Discharging Stations

Bulk Container Systems

www.ucon.de

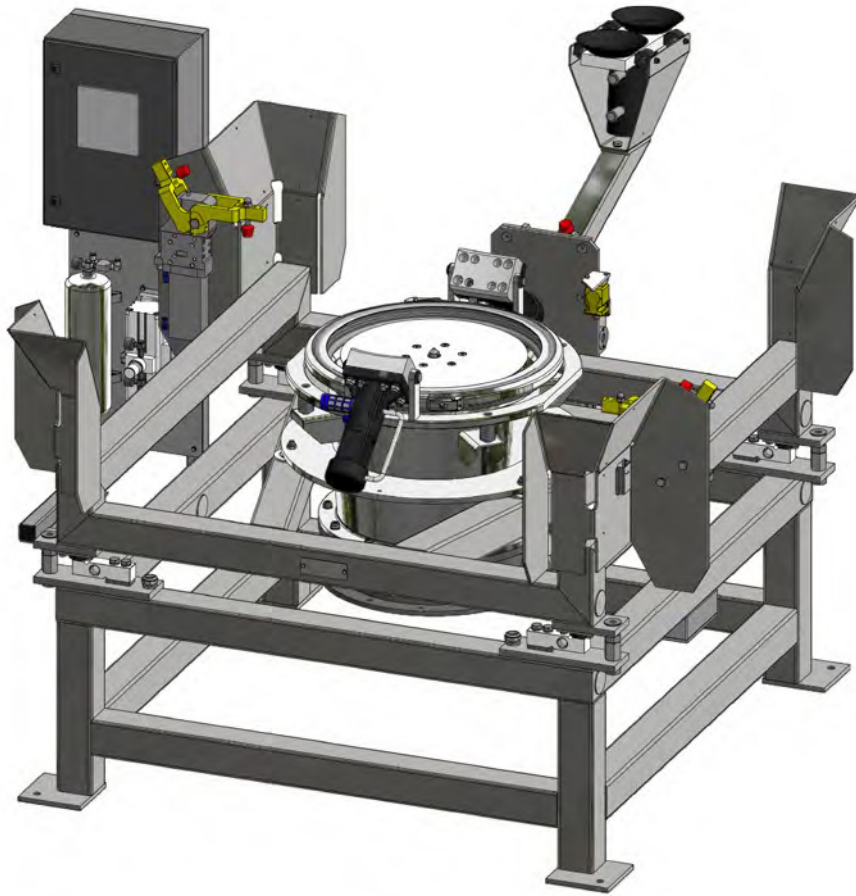

Nenninhalt nom. capacity	A	B	C
600	1215	1100	-
1000	1505	1390	290
1200	1655	1540	440

Yes, gevonden!
CONSENSYS biedt de oplossingen voor ons!
Bel jij met een aanvraag?
>> Gerard Noordhof
op +31 6 3039 2646



FOODSTUFF | PHARMACEUTICALS | METALS

BPK 3 Cone Valve Systems.

UCON Bulk Technology.



		Basic	Plus	Top
Materials	Product wetted: Stainless Steel AISI 304 / 316L	● / ○ / ○ (1)	● / ○ / ○ (1)	● / ○ / ○ (1)
	Frame: Stainless Steel AISI 304 / 316Ti	● (1)	● (1)	● (1)
	Seals: Silicon / PTFE / EPDM	● / ● / ○	● / ● / ○	● / ● / ○
	Cabinet: Steel painted (RAL 7035) / Stainless Steel	● / ^	● / ^	● / ^
	Discharge cylinder lifting capacity by 6 bar / 10 bar [kN]	13 / 21	13 / 21	13 / 21
	Discharge cylinder air amplifier (10 bar)	○	○	○
	Discharge cylinder lifting height [mm]	130	130	130
	Outlet connection: flange DN 400 / adaptation	● / ^	● / ^	● / ^
Equipment	Middle part - Protective cover manually	○	○	●
	Shock mounts / base frame with base plates	● / ○	- / ●	- / ●
	Base frame (height according to the arrangement)	○	○	○
	Container locking	-	●	●
	Linear vibrator with swivel arm	-	○	●
	Vibrator at the container outlet on one side / both sides	-	● / ○	● / ○
	Rotary vibrator on the outlet	●	●	●
	Base frame with load cells	-	○	●
	Inflatable gaskets between container / discharge station	●	●	●
	Control-Unit	Pneumatic (pressure supply and valves)	●	●
UCON Discharge-Unit separate operator panel*		○	●	-
UCON Dosing-Unit with separate operator panel**		-	-	●
Optional	ATEX	○	○	○
	EGVo 10/2011 und FDA	○	○	○

* This unit consist of: Siemens Simatic minicontroller / Text display: parameter for stroke, pulsing and vibrator mode, error messages / PLC Interface

** This unit consist of: Siemens Simatic S7 / Graphic display for intuitive Operation, automatic flow control / Material based dosing parameter with parameter management / Dosing tolerance ± 100 [g] (2) / Automatic and service mode, scale setup, operator management (password) / Graphic of dosing (f/t)

● Standard ○ Optional - Not included ^ By Arrangement (1) Other materials on request (2) Depending on product



Custom, application oriented, solutions upon request.
 Contact us, we look forward hearing from you!

